


SPACE REQUIREMENTS:

Minimum Room Size

(Does not meet ADA requirements)

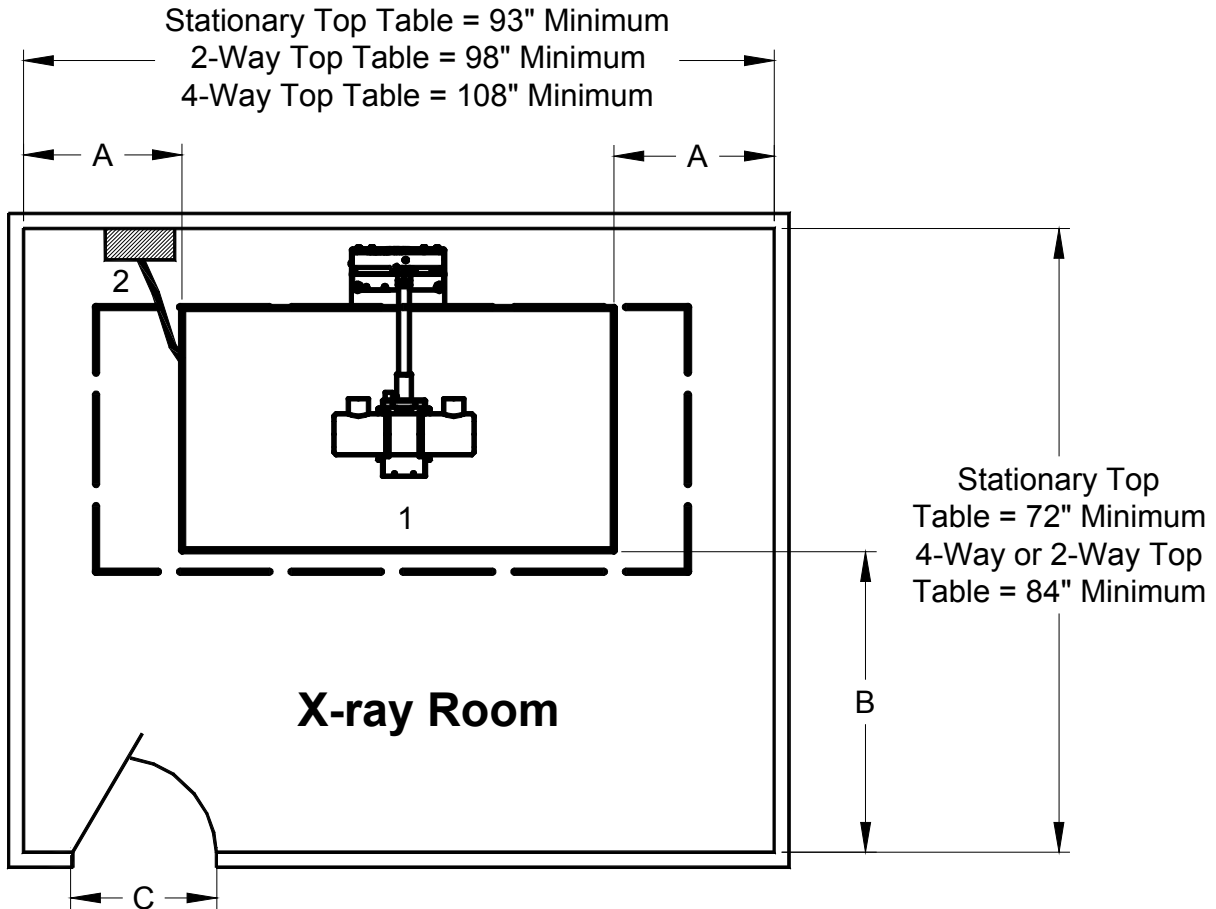


Legend:

ITEM	DESCRIPTION	WIDE	DEEP	HIGH	LBS.
1	Stationary Top Table	53"	29"	82.5"	350
	2-Way Float Top Table	58"	45"	82.5"	400
	4-Way Float Top Table	75"	45"	82.5"	420
2	Safety Disconnect Switch (provided by others) - see Page 2 for details				
3	Flexible Cable – included with system see Page 2 for details				

SPACE REQUIREMENTS:

- A. Recommended access space of 20" minimum at each end of table for operator access
- B. Recommended 36" minimum in front of table for operator access & patient transfer.
- C. Minimum opening: Stationary Top = 26", 2-Way or 4-Way Top = 34"

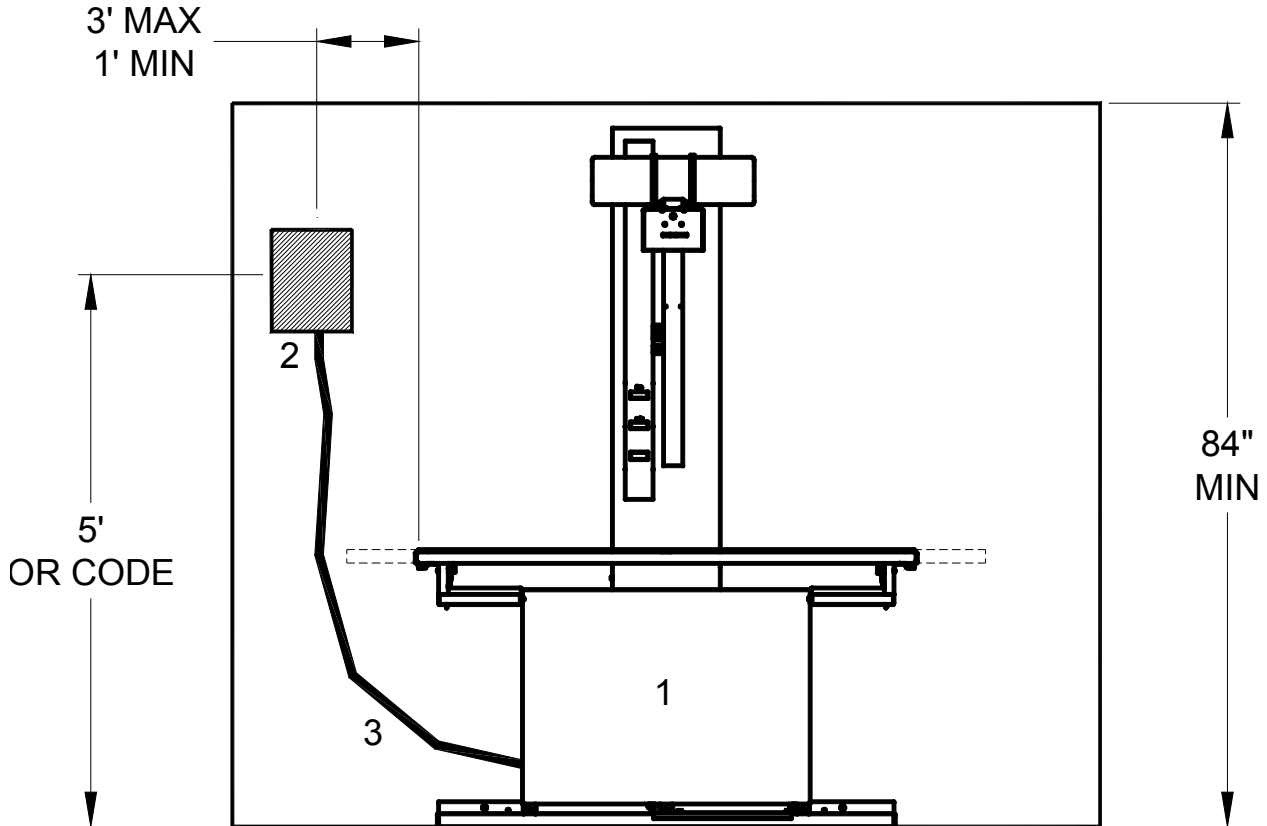

ELECTRICAL REQUIREMENTS:

X-ray Generator:

- a) Requires **3 Phase**, four wire service. **COPPER wire only.**
- b) Requires a surface mounted Safety Disconnect Switch as follows:
 - 1) adequate capacity (see requirements below) to serve as a disconnecting means for the Generator Power Module, and clearly marked.
 - 2) appropriate fuses or circuit breaker.
 - 3) requires a true earth grounding wire going back to the main panel.
 - 4) mounted as shown in above diagram.
 - 5) 1" cable clamp at bottom with empty #6 ground lug.
 - 6) permanent electrical service is on.

If available 3 phase Line Voltage is:	Required minimum rating* of over-current protection & Safety Disconnect Switch	Requires Generator modification Part #
208-230 VAC	70 Amps	08168-002
230-240 VAC	60 Amps	n/a
380-480 VAC	35 Amps	08168-003

* Minimum rating for full 30kW x-ray output. If the available Amps are less than required, the x-ray generator may work, however the x-ray output will be less than the full 30kW output.

- c) Recommended minimum wire size (in AWG) of power and earth wires. Copper wire only. Contact Summit for distances greater than 100 ft.:

If available 3 phase Line Voltage is:	Length between the building's main incoming electrical panel to the service disconnect switch in the x-ray room			
	25 ft.	50 ft.	75 ft.	100 ft.
208-230 VAC	8	4	3	2
230-240 VAC	8	4	3	2
380-480 VAC	10	8	6	4

- d) Flexible Electrical Cable (about 1" diameter), 8' long, is provided with the system for connection thru bottom of Safety Disconnect Switch by Installer. Note: If local regulations require a different wire size or type, it is the customer's responsibility to provide the required items.

MOUNTING REQUIREMENTS:

X-ray Table: Requires finished floor. To be mounted by Installer.

X-ray Room: Provided by others:

1. Radiation protection is installed per local requirement. May require shielding report from licensed radiation physicist.
2. Final paint is on the walls and ceiling.
3. If ceiling is suspended tile, it is installed.
4. Door to x-ray room is installed.
5. Floor covering is installed and able to be walked on.
6. Light fixtures and electrical outlets are installed and working.
7. All cabinets, molding and fixtures are installed.
8. There is unobstructed access to the room. Building climate controls are operational.

Important Note: If the installation engineer arrives and determines that the site is not ready, the customer will be responsible for the additional cost to send the installation engineer again once the site is ready. Summit Industries will not guarantee date availability.

Summit Industries is not responsible for the costs to relocate the safety disconnect.

OTHER INFORMATION:

If a Clinic takes twelve (12) x-ray exposures per (8-hour) day (average clinic) and system is in idle approximately 8 hours per day:

- Heat Output: 609 BTU per hour
- Electrical Energy Consumption in idle and with x-ray exposures: 150 Watts per day. (Equivalent to a 150 Watt light bulb on for 8 hours)
- Electrical Energy Consumption in idle and without x-ray exposures: 120 Watts/day.